

3" 200FCD

Compression Driver



Key features:

- VERY LOW RESONANT FREQUENCY

- COPPER CAP DEMODULATION RING, POWERFUL MOTOR STRUCTURE

- DESIGNED FOR LARGE SPEAKER SYSTEMS WHERE HIGH SPL IS REQUIRED

Design notes:

The 200FCD compression driver is a very high performance high frequency device ideal for large professional loudspeaker systems. The driver uses all components that were designed and manufacture with one objective in mind - be the best. The driver's phase plug is CNC machined from solid aluminum with

unbeaten level of precision. The dome is carefully attached to the voice coil with our sandwich joint, improving the transfer of the high frequencies and further improving power handling and reliability of the driver.

Diaphragm Assembly
The driver features a 75mm pure titanium

diaphragm. Suspension is formed from Polyimide material.
The acoustic output exits through an aluminum, radial 3 slot phase plug and a 2.0 inch throat aperture. Nominal sensitivity is 108.5 dB 1watt / 1 meter.

Specifications:

General specs	
Nominal Diameter:	3"
Rated Impedance:	8 ohm
Power handling	
AES Power:	110 watts
Program Power:	220 watts
Peak Power:	440 watts
Voice Coil	
Diameter:	76 mm
Winding wire:	CCAR
Former:	kapton
Winding height:	2.6 mm


T/S Parameters	
Resonant frequency:	500 Hz
Re:	5.5 ohm
Sensitivity:	108.5 dB

Design details	
Dome Material:	Titanium
Magnet material:	Ferrite
Overall diameter:	180 mm
Bolt circle diameter:	102 mm
Mounting holes:	4
Depth:	91.5 mm
Net weight:	5 kg

Ordering codes:	
CD-3-003-8R-B2-C0001	
Legacy code: 200FCDX8-049	
Recone kits:	
RC200FCDX8-049	


In many cases REDCATT produces 4, 8 and 16 ohm versions — indicate what impedance you need in your request.

Frequency response & Impedance

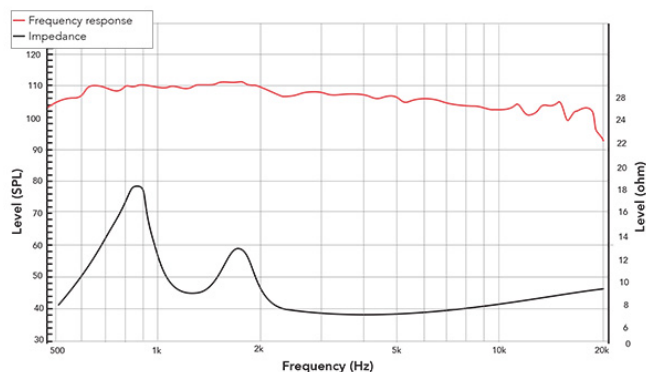

Frequency response measured on IEC baffle

2D drawing

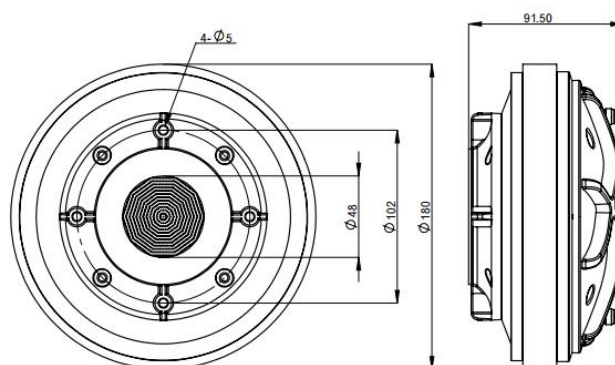

info@redcatt.net

www.redcatt.net