



Key features:

- EXTENDED LOW FREQUENCY RESPONSE
- LIGHTWEIGHT CARBON FIBER LOADED PAPER CONE
- HIGH SPL

Design notes:

The 152FIND is a high efficiency, (99 dB 1watt / 1 meter) 15-inch woofer with incredibly linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts. The 152FIND uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum excursion of

15mm.

Power Handling

At the core of the 152FIND is it, Åôs voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 280C, well beyond the thermal requirements of modern professional audio systems.

The 152FIND cone and dust cap are made using an advanced carbon fiber

loaded REDCATT pulp. The woofer cone is also extensively treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:

General specs

Nominal Diameter: 15"

Rated Impedance: 8 ohm

Power handling

AES Power: 800 watts

Program Power: 1600 watts

Peak Power: 3200 watts

Voice Coil

Diameter: 3 in.

Winding wire: CCAW

Former: Glass Fiber

Winding height: 18.9 mm

T/S Parameters

Resonant frequency: 44 Hz

Re: 4.8 ohm

Qes: 0.38

Qms: 13

Qts: 0.37

Vas: 128.5 liters

Sd: 829.6 cm²

Sensitivity: 99 dB

Mms: 95.6 grams

Bl: 18.3

Le: 0.98 mH

Design details

Surround Material: Fabric

Cone material: Paper

Spider: Nomex

Plate thickness: 10 mm

Peak to peak linear cone displacement: 15 mm

Overall diameter: 392 mm

Bolt circle diameter: 373 mm

Baffle cutout dia.: 360 mm

Number of mounting holes: 8

Depth (flange to rear): 137 mm

Net weight: 8.5kg

Ordering codes:


152FIND-X8 ohm-115

Recone kits:

RC152FINDX-115

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

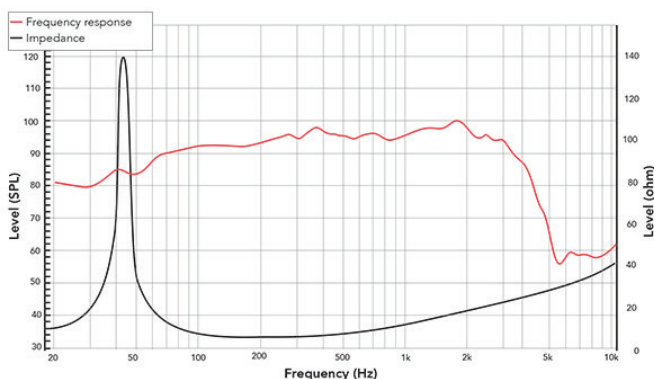

Frequency response measured on IAC baffle

2D drawing

