



Key features:

- LF AND HF INTEGRATED FERRITE-NEODYMIUM MAGNETIC CIRCUIT
- ALUMINUM SYMMETRICAL HORN
- GOOD OFF-AXES FREQUENCY RESPONSE

Design notes:

The CX8F-140F is a high efficiency, (92.5dB 1watt / 1 meter) 8-inch coaxial speaker with very linear frequency response characteristics and high power handling capability. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many of our successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD and has

integrated symmetrical aluminum horn. The combination of used materials with our state of the art quality production yields in well performing driver even in the most demanding and extreme weather conditions.


Magnetic circuit design
REDCATT engineers have developed ferrite-neodymium based magnetic circuit, capable of

delivering the highest level of performance in a small form factor. The combination of ferrite and neodymium delivers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

Specifications:

General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8 "	Resonant frequency: 86/1000 Hz	Surround Material: fabric/PEN	DR-8-030-8R-B2-C0001
Rated Impedance: 8 ohm	Re: 5.6/5.5 ohm	Cone material: Paper CF/PEN	Legacy code: CX8F-140FX8X8-374B
Power handling	Qes: 0.63	Spider: Nomex	Recone kits:
AES Power: 150/30 watts	Qms: 9.06	Plate thickness: 8 mm	RCCX8F-140FX8X8-374B
Program Power: 300/60 watts	Qts: 0.59	Overall diameter: 207 mm	In many cases REDCATT produces 4, 8 and 16 ohm versions — indicate what impedance you need in your request.
Peak Power: 600/120 watts	Vas: 10.7 liters	Bolt circle diameter: 197.2 mm	
Voice Coil	Sd: 213.8 cm²	Baffle cutout dia.: 178 mm	
Diameter: 50.8/35.6 mm	Sensitivity: 94 dB	Mounting holes: 8	
Winding wire: CCAW	Mms: 20.2 grams	Depth: 107.5 mm	
Former: Glass Fiber/kapton	Bl: 9.93	Net weight: 2.8 kg	
Winding height: 12/2.5 mm	Le: 0.47 mH		

Frequency response & Impedance

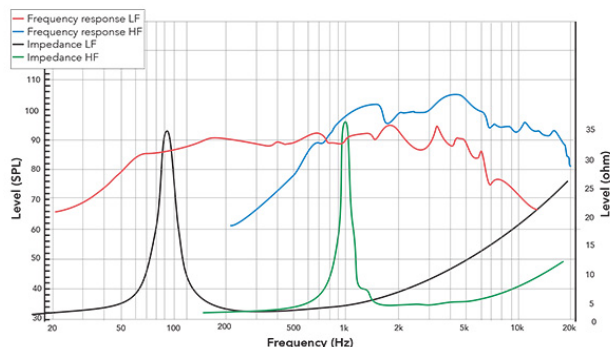

Frequency response measured on IEC baffle

2D drawing

