

1.8" 181FCD

Compression Driver



Specifications:

General specs	
Nominal Diameter:	1.8 "
Rated Impedance:	8 ohm
Power handling	
AES Power:	70 watts
Program Power:	140 watts
Peak Power:	280 watts
Voice Coil	
Diameter:	45.7 mm
Former:	NSV
Winding height:	2.5 mm

T/S Parameters	
Resonant frequency:	1000 Hz
Re:	5.2 ohm

Design details	
Dome Material:	PEN
Surround material:	N/A
Magnet material:	Ferrite
Overall diameter:	110 mm
Bolt circle diameter:	57 mm
Mounting holes:	4
Depth:	62.83 mm
Net weight:	1.75 kg

Ordering codes:

CD-1.8-006-8R-B2-C0001

Legacy code: 181FCDX8-227A


Recone kits:

RC181FCDX8-227A

In many cases REDCATT produces 4, 8 and 16 ohm versions — indicate what impedance you need in your request.

Frequency response & Impedance

2D drawing

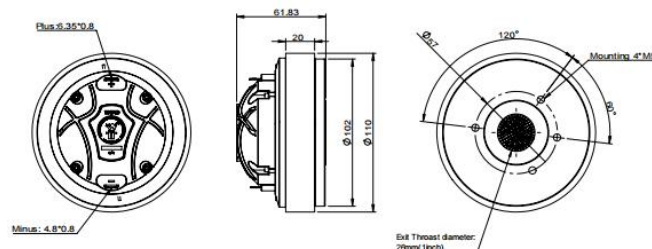

info@redcatt.net

www.redcatt.net