

10" 10INOF

Mid-Woofer



Specifications:

General specs	
Nominal Diameter:	10 "
Rated Impedance:	8 ohm
Power handling	
AES Power:	250 watts
Program Power:	500 watts
Peak Power:	1000 watts
Voice Coil	
Diameter:	63.5 mm
Winding wire:	Copper
Former:	TIL
Winding height:	16.1 mm

T/S Parameters	
Resonant frequency:	56.2 Hz
Re:	7.2 ohm
Qes:	0.32
Qms:	3.66
Qts:	0.29
Vas:	32.75 liters
Sd:	349 cm ²
Sensitivity:	95 dB
Mms:	42.38 grams
Bl:	18.2
Le:	0.7 mH

Design details	
Surround Material:	fabric
Cone material:	Paper CF
Spider:	Nomex
Plate thickness:	8 mm
Overall diameter:	256 mm
Bolt circle diameter:	246.5 mm
Baffle cutout dia.:	228.5 mm
Mounting holes:	8
Depth:	109.5 mm
Net weight:	4.5 kg

Ordering codes:

DR-10-005-8R-B2-C0001

Legacy code: 103FINDX8-583B


Recone kits:

RC103FINDX8-583B

In many cases REDCATT produces 4, 8 and 16 ohm versions — indicate what impedance you need in your request.

Frequency response & Impedance

2D drawing

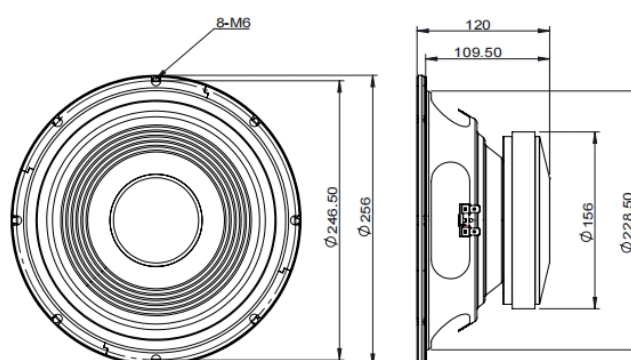

info@redcatt.net

www.redcatt.net